


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

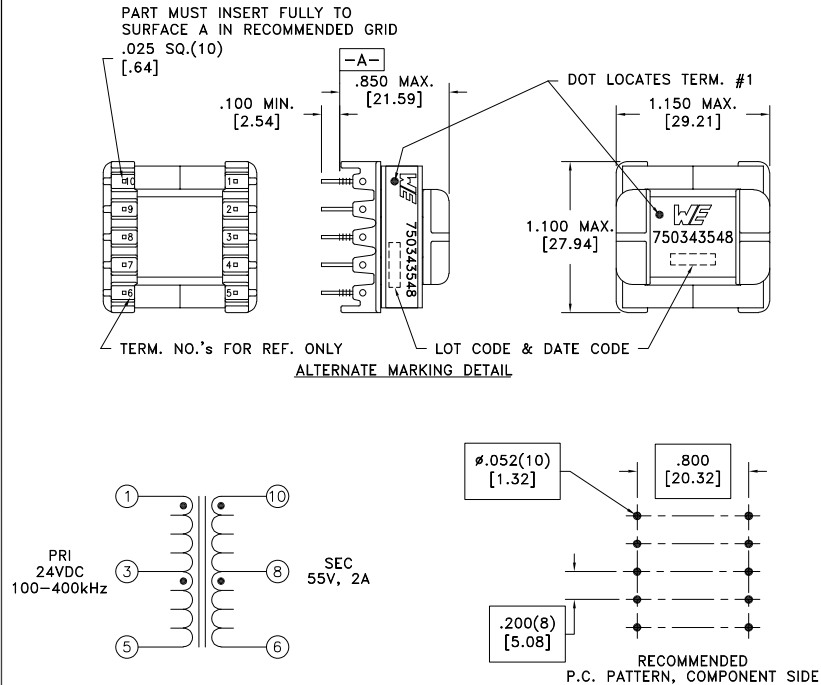

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-5 @20°C	0.025 ohms max.
D.C. RESISTANCE	10-8 @20°C	0.058 ohms max.
D.C. RESISTANCE	8-6 @20°C	0.080 ohms max.
INDUCTANCE	1-5 10kHz, 100mVAC, Ls	100.00uH min.
DIELECTRIC	1-10 1875VAC, 1 second	1500VAC, 1 minute
DIELECTRIC	10-Core 1875VAC, 1 second	1500VAC, 1 minute
DIELECTRIC	1-Core 625VAC, 1 second	500VAC, 1 minute
6B TURNS RATIO	(10-8):(1-3)	3:1
6B TURNS RATIO	(8-6):(1-3)	3:1

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

6B Designed to comply with the following requirements as defined by IEC62368-1, EN62368-1, UL62368-1/CSA62368-1 and AS/NZS62368.1:
- Basic insulation for a primary circuit at a working voltage of 150Vpeak.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	 CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.001 [.03]	DRAWING TITLE TRANSFORMER	PART NO. 750343548
6B	6/22	Method: Tray PKG-0820 www.we-online.com/midcom				
6A	9/17	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750343548	SPECIFICATION SHEET 1 OF 1

